


# ダクトEF型 (静電防止)

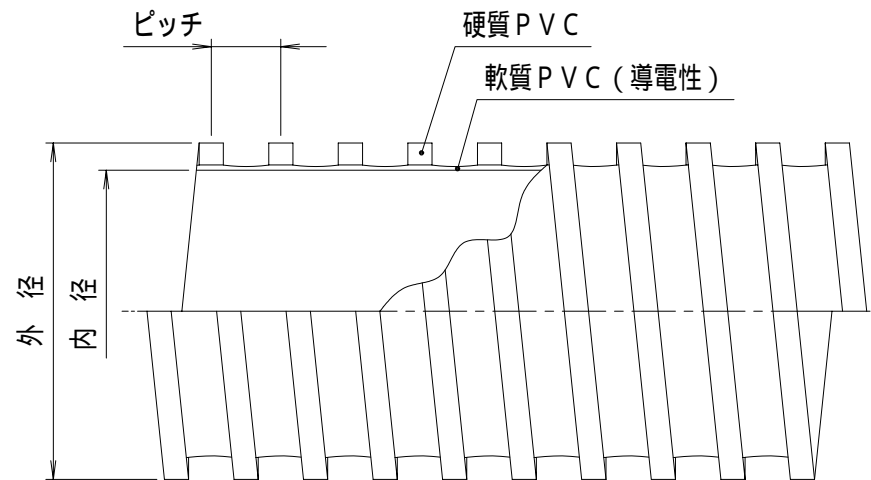

| サイズ | 内径 (mm) | 外径 (mm) | ピッチ (mm) |
|-----|---------|---------|----------|
| 32  | 32.4    | 38.6    | 8.4      |
| 38  | 37.3    | 44.5    | 9.2      |
| 50  | 50.6    | 59.8    | 10.0     |
| 65  | 62.4    | 71.6    | 12.0     |
| 75  | 76.4    | 86.4    | 13.0     |
| 90  | 88.9    | 99.5    | 13.5     |
| 100 | 101.6   | 112.2   | 15.0     |
| 125 | 125.9   | 138.7   | 21.0     |
| 150 | 152.4   | 164.8   | 20.0     |